

REPAIR SHEET

BRAND


RYOBI

MODEL NO.

PCL525

DESCRIPTION

18 Volt Jig Saw

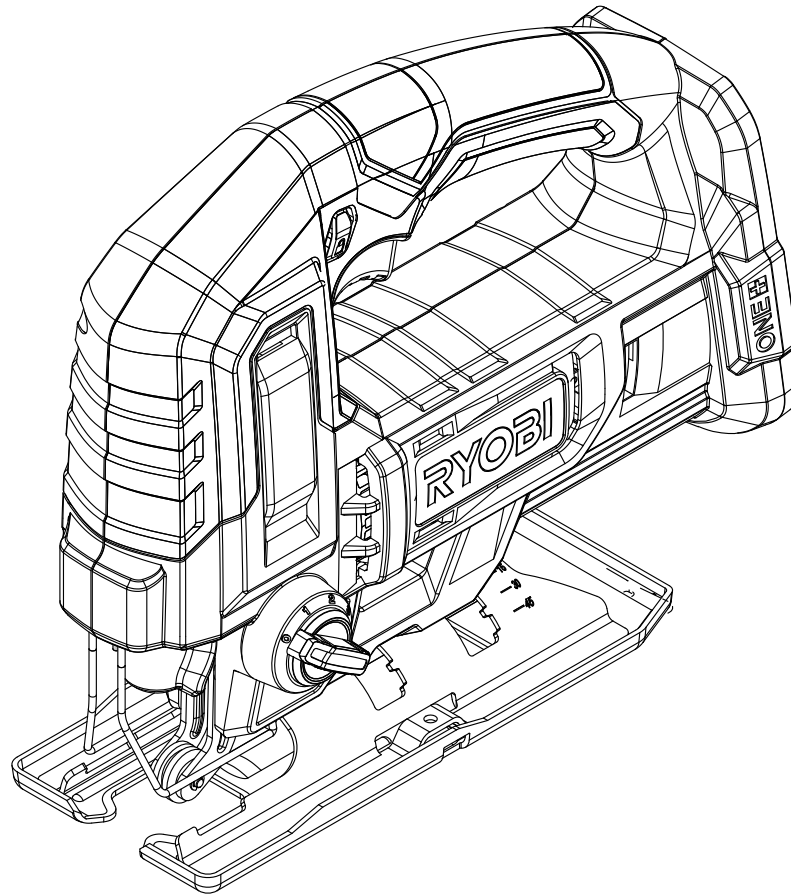


TTI CONSUMER POWER TOOLS, INC.

P.O. Box 1288, Anderson, SC 29622 ■ 1-800-525-2579 ■ www.ryobitools.com

1-11-23 (Rev:06)

The model number and manufacturing location will be found on a label attached to the product. Always mention this information in all communications regarding this product and when ordering parts.

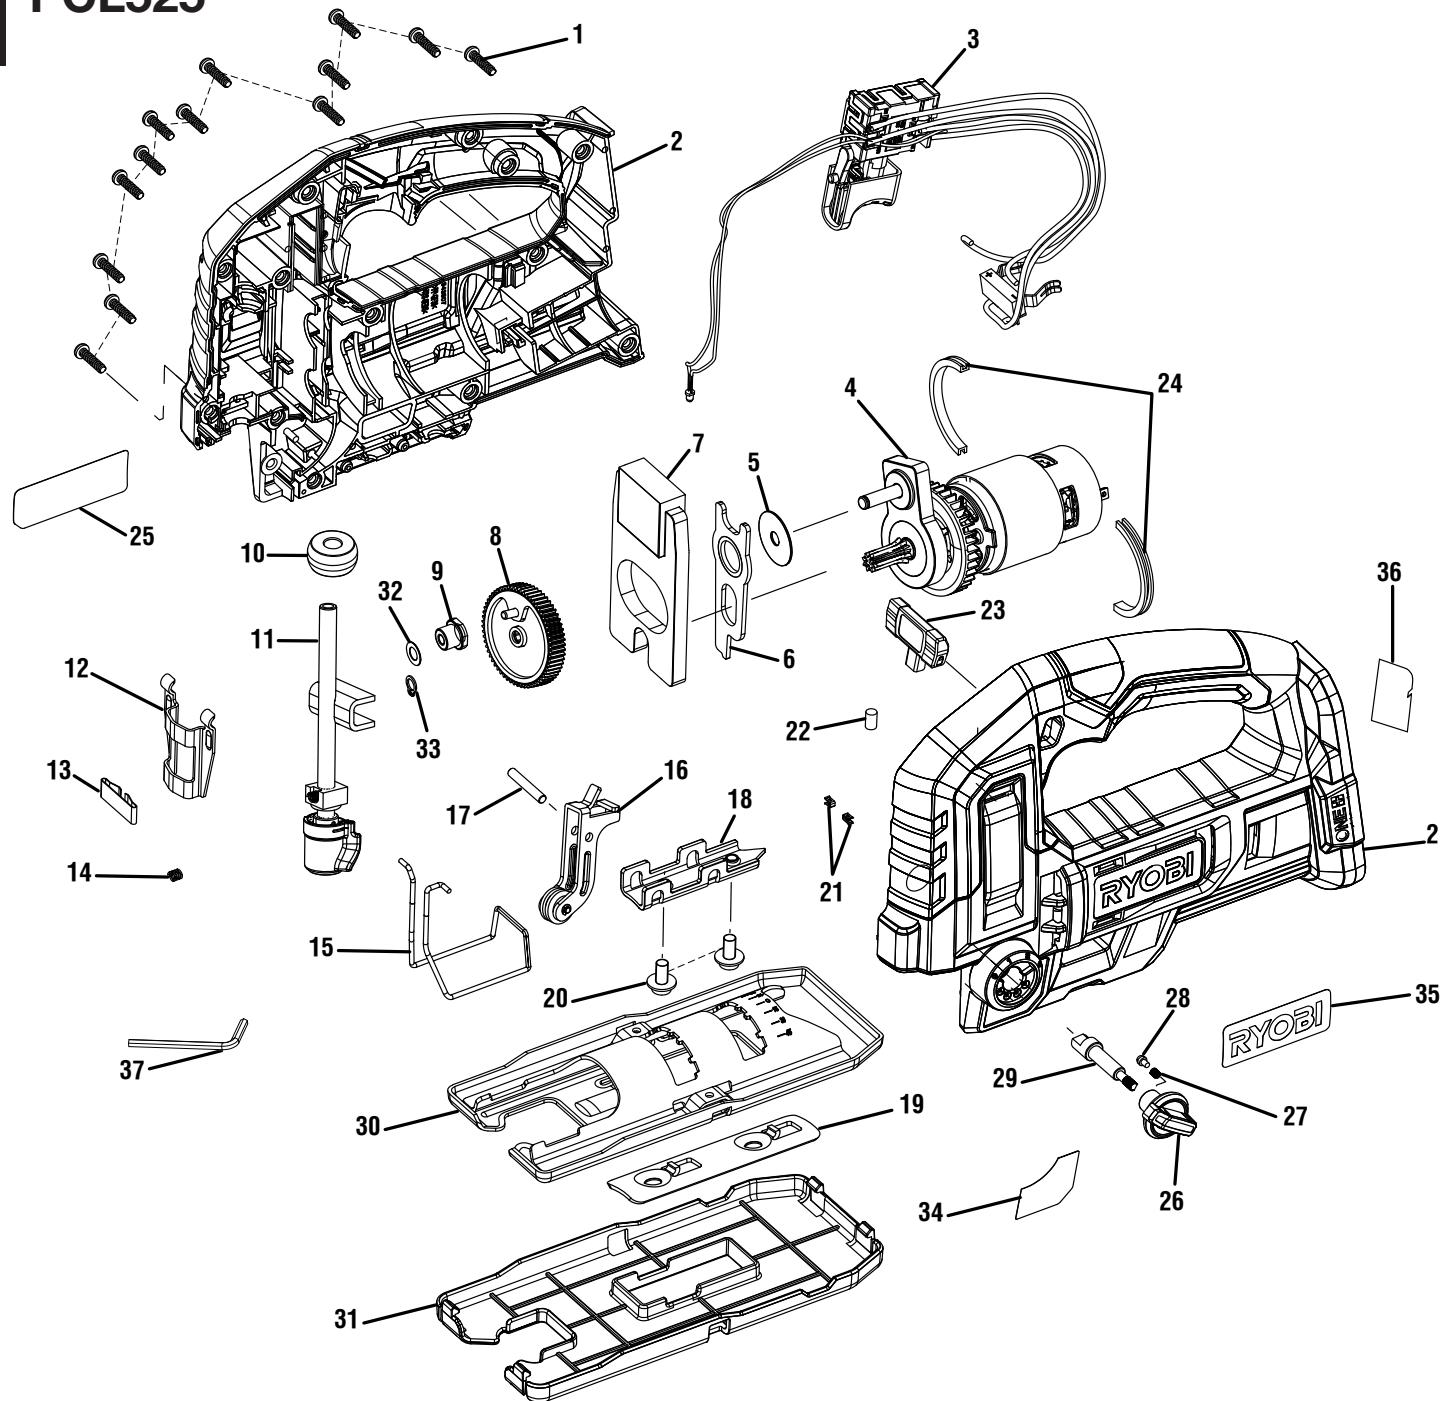

**PCL525****PARTS LIST**

KEY NO.	PART NO.	DESCRIPTION	QTY.
1	660024018	Screw (M4 x 16 mm, T-20 Torx Pan Hd.)	13
2	CN- 204210002	Housing Assembly (Inc. Key Nos. 25 and 34-36)	1
	VN- 204210005	Housing Assembly (Inc. Key Nos. 25 and 34-36)	1
3	CN- 270016276	Switch Assembly	1
	VN- 270016273	Switch Assembly	1
4	CN- 206210002	Motor Assembly	1
	VN- 206210003	Motor Assembly	1
5	630844001	Washer	1
6	301627001	Drive Plate Assembly	1
7	611716004	Balance Block	1
	684469001	Balance Block	1
8	CN- 204210004	Gear Box Assembly	1
	VN- 204210006	Gear Box Assembly	1
9	693115003	Bushing (OD10 x ID4 x H10 mm)	1
10	611841001	Bushing	1
11	304944023	Saw Bar Assembly	1
12	630845001	Slide Guide Plate	1
13	631252001	Spring Plate	1
14	693240001	Spring	1
15	635565003	Guard Wire	1
	670565002	Guard Wire	1
16	305061007	Roller Assembly	1
17	673814001	Pin	1

KEY NO.	PART NO.	DESCRIPTION	QTY.
18	317694001	Base Bevel Plate	1
	657566001	Base Bevel Plate	1
19	634911001	Piston Plate	1
20	661276002	Screw (M5 x 10 mm, Hex Washer Hd.)	2
21	636124001	Drive Plate Holder	2
22	560219006	Contact Plate Stopper	1
23	543510001	Lock-Out Button	1
24	570264001	Rubber Cushion	2
25	941120868	Icon/Warning Label	1
26	543509001	Orbital Knob	1
27	680909001	Spring	1
28	550424001	Detent Button	1
29	673054003	Orbital Pin	1
30	634908005	Base Plate	1
31	543862002	Base Cover	1
32	670914001	Flat Washer (ID6.2 x OD11 x 0.3t)	1
33	670704001	Retaining Ring (External)	1
34	941120869	Orbital Mode Label	1
35	941114321	RYOBI Logo Label	1
36	CN- 941123783	Data Label	1
	VN- 941124276	Data Label	1
37	694108002	Hex Key (M4)	1
	Not Shown:		
	998000795	Operator's Manual	

